

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## U-SERTS®


YOU KNOW THE PROBLEM YOU HAVE ATTACHING PARTS TO THIN METAL OR OTHER LIGHTWEIGHT MATERIALS, ESPECIALLY IN A BLIND APPLICATION.

- Sheet metal screws **will not support heavy weights**, vibrate loose, easy to over-torque or will not produce a tight fit.
- Nuts and bolts may require **two people** to install and often means equipment to be disassembled and they cannot be used in blind applications

### O.E.M. HAS SOLVED THESES PROBLEMS

- Now...at Last, a simple, easy and effective method for installing parts in thin materials...or even blind hole applications
- New improved thin sheet U-SERTS®
- Fast, easy to use
- No complicated instructions
- Saves time and labour

### INSTRUCTIONS

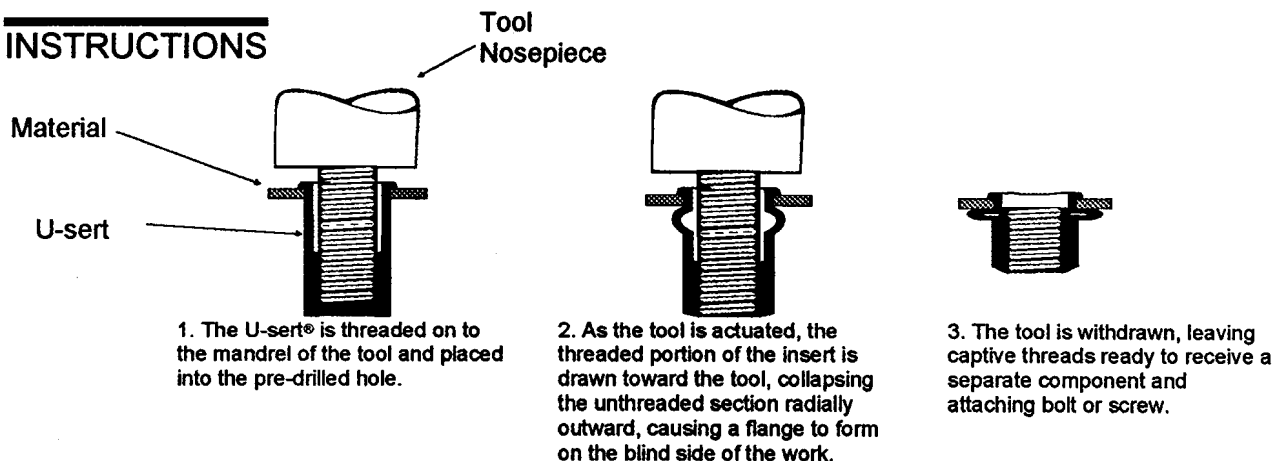

Thin U-SERTS® are designed to secure threads from one side of the work in materials generally too thin to support them. Thin U-SERTS® are ideal for blind, closed, or through hole applications in thin sheet metal, fiberglass, all lightweight truck and trailer body panels, electrical control panels and control boxes.


- Provides fast, easy installation
- withstands high loads without vibration or loosening under extreme operating conditions
- Performance has been proven in plastic, aluminum, steel and fiberglass

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## THIN SHEET U-SERTS® (Con't)

---



- Can be installed after **painting** or finishing without damaging the surface.
- Will **not loosen** or turn-out when over-torqued.
- **Easily Installed** on flat or curved surfaces.
- Self-tightening with repeated use.
- Makes complete **360°** contact with hole.
- **Excellent holding power** in vibration areas.
- **U-SERTS®** are available to cover all material thicknesses

---

### APPLICATIONS

- Applications include sheet metal work, furniture repair, restroom stalls, picture hanging, sign mountings as well as:
- Side view mirrors
- Side mount antennas
- Truck bed rails
- Exhaust stack brackets
- Roof racks
- CB installation
- Truck horns
- Truck overhead lights
- and many, many more

---

### CAN BE USED IN:


- Soft or ductile material
- Blind hole application
- Thick metals
- Thin metals

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## THIN SHEET U-SERTS® SPECIFICATIONS

**Material:** 1006-1010 Low Carbon Steel  
**Plating:** Type II Class 3 with supplementary Clear Chromate  
**Finish:** Zinc Plate




INSERTS

Thin Sheet Insert Part No.	Thread Size	Mandrel Part No.	Grip Range	Hole Size	Coballoy SP11 <sup>®</sup> DRILL No. PART No.	'A' Max.	'B' Max.	'C' Max.	Push out (lb-AVG)	Stainless Steel Insert Part No.	Spline Insert Part No.
632 (BAA)	6-32	6320 (B)	.020/.080	.250/.254	1/4-#70316	.249	.410	.287	320	799-447	799-609
832 (BAA)	8-32	8320 (B)	.020/.080	.250/.254	1/4-#70316	.249	.410	.287	320	799-448	799-611
1024 (BAA)	10-24	10240 (B)	.020/.130	.281/.285	9/32-#70318	.249	.465	.320	410	799-450	799-612
799-100 (BAA)	10-24	10240 (B)	.126/.225	.281/.285	9/32-#70318	.249	.575	.320	410		
1032 (BAA)	10-32	100320 (B)	.020/.130	.281/.285	9/32-#70318	.249	.465	.320	410	799-449	799-613
799-105 (BAA)	1032	100320 (B)	.125/.225	.281/.285	9/32-#70318	.249	.575	.320	410		
1420 (BAA)	1/4-20	1421 (B)	.030/.165	.375/.379	3/8-70324	.374	.610	.415	505	799-451	799-614
1420L (BAA)	1/4-20	1421 (B)	.150/.260	.375/.379	3/8-70324	.374	.710	.415	505		
1428 (BAA)	1/4-28	14280 (B)	.030/.165	.375/.379	3/8-70324	.374	.610	.415	505		
799-110 (BAA)	1/4-28	14280 (B)	.150/.260	.375/.379	3/8-70324	.374	.710	.415	505		
51618 (FA)	5/16-18	516 (B)	.040/.200	.500/.504	1/2-#70332	.499	.720	.540	670		
799-115 (FA)	5/16-18	516 (B)	.185/.312	.500/.504	1/2-#70332	.499	.835	.540	670		
799-120 (FA)	5/16-24	799-125 (B)	.040/.200	.500/.504	1/2-#70332	.499	.720	.540	670		
3816 (FA)	3/8-16	318 (B)	.040/.200	.500/.504	1/2-#70332	.499	.720	.540	670		
11310 (FA)	4MM	7936 (B)	.020/.080	.250/.254	1/4-#70316	.249	.410	.287	320		
11311 (FA)	5MM	7937 (B)	.020/.130	.281/.285	9/32-#70318	.280	.465	.320	410		
11312 (FA)	6MM	7938 (B)	.030/.165	.375/.379	3/8-#70324	.374	.610	.415	505		
11315 (FA)	8MM	7940 (B)	.040/.200	.500/.504	1/2-#70332	.499	.720	.540	670		

### Strength Tests

**TORQUE STRENGTH:** With an attaching part over the Thin Sheet U-sert®, offering a bearing surface, the TSU will remain intact past the point of the screw or bolt breaking (head torqued off). In almost all cases the threads of the TSU will remain undistorted and servicable - an exception to this statement is when an extremely high tensile bolt is used.



For installation please use Part No. 50404



SEE PAGE B-7

Available in individual sizes or in our **SUPERFIX®** Assortments **#3800, #7735, #7740, #700-055.**


# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## THICK SHEET U-SERTS®



The thick-sheet U-sert®, held securely in place by the placing tool, is inserted into the pre-drilled hole



The tool mandrel breaks the conical-shaped portion loose, drawing it up into the sleeve.



The threaded portion of the U-sert® expands the sleeve into a full 360° contact fit. The U-sert® is ready to receive a mating part with a bolt or screw.

Thread Size	Part No.		Mandrel	Part No.	
4-40	799-150	BAA	4-40	799-155	B
6-32	6321		6-32	6320	
8-32	8321		8-32	8320	
10-24	10241		10-24	10240	
10-32	10321		10-32	100320	
1/4-20	14201		1/4-20	1421	
1/4-28	799-160		1/4-28	14280	
5/16-18	516181		5/16-18	516	
5/16-24	799-165		5/16-24	799-125	
3/8-16	38161		3/8-16	318	
3/8-24	799-170		3/8-24	799-175	
3 MM	799-200		3 MM	799-205	
4 MM	799-210		4 MM	7936	
5 MM	799-215		5 MM	7937	
6 MM	799-220		6 MM	7938	
8 MM	799-225		8 MM	7940	
10 MM	799-230		10 MM	799-235	

For installation please use Part No. 50404

Available in individual sizes or in our **SUPERFIX®** Assortments #7735, #7740, #700-060.

# O.E.M. HARDWARE



*Hard to Find Fasteners Our Specialty™*

## THICK SHEET U-SERTS® SPECIFICATIONS

THICK U-SERTS® CONFORM TO ALL OR PART OF THE FOLLOWING

MIL-Q-9858a Quality program system requirements
MIL-STD-202b Test methods for electronic and electronic component parts
MIL-D-70327 Drawings, engineering and associated lists
QQ-5-633a Steel bars, carbon, cold finished and hot rolled (general purpose)
Fed.Std. No. 66b Steel: chemical composition and hardenability
MIL-Std-171a(ord) Finishing of metal and wood surfaces
MIL-S-5002a Surface treatments and metallic coating for metal surfaces of weapons
QQ-P-416a Plating, cadmium (electrodeposited)
QQ-2-325a Zinc Coating, electrodeposited: general requirements for

### THICK MATERIAL U-SERT® SPECIFICATION



For installation  
please use  
Part No. 50404


PART NUMBER (STEEL)	THREAD SIZE CLASS 2B AFTER INSTALLATION		"A" MAX	"B"	"M" MIN	VARYING HOLE SIZE, DRILL SIZE, <i>Coballoy SPII</i> Part No.											
						FROM .030 TO .090			FROM .081 TO .124			FROM .125 TO .186			OVER .312		
<b>799-160</b>	4-40	UNC	.187	.203	.370	.1875	3/16"	70328	.1935	#10	72310	.1935	#10	72310	.1935	#10	72310
<b>6321</b>	6-32	UNC	.216	.238	.370	.2188	7/32"	70314	.2210	#2	72302	.2280	#1	72301	.2280	#1	72301
<b>8321</b>	8-32	UNC	.249	.284	.370	.2500	1/4"	70316	.2570	"F"	73306	.2610	"G"	73307	.2610	"G"	73307
<b>10241</b>	10-24	UNC	.280	.300	.370	.2812	9/32"	70318	.2900	"L"	73312	.2900	"L"	73312	.2969	19/64"	70319
<b>10321</b>	10-32	UNF	.280	.300	.370	.2812	9/32"	70318	.2900	"L"	73312	.2900	"L"	73312	.2969	19/64"	70319
<b>14201</b>	1/4-20	UNC	.374	.398	.510	.3750	3/8"	70324	.3750	3/8"	70324	.3750	"W"	73323	.3906	25/64"	70325
<b>799-160</b>	1/4-28	UNF	.374	.398	.510	.3750	3/8"	70324	.3750	3/8"	70324	.3750	"W"	73323	.3906	25/64"	70325
<b>516181</b>	5/16-18	UNC	.499	.524	.610	.5000	1/2"	70332	.5000	1/2"	70332	.5000	33/64"	70333	.5156	33/64"	70333
<b>799-165</b>	5/16-24	UNF	.499	.524	.610	.5000	1/2"	70332	.5000	1/2"	70332	.5000	33/64"	70333	.5156	33/64"	70333
<b>38161</b>	3/8-16	UNC	.561	.590	.740	.5625	9/16"	70336	.5625	9/16"	70336	.5625	9/16"	70336	.5781	37/64"	70337
<b>799-170</b>	3/8-24	UNF	.561	.590	.740	.5625	9/16"	70336	.5625	9/16"	70336	.5625	9/16"	70336	.5781	37/64"	70337
<b>799-200</b>	3 MM		.185	.202	.360	.1875	3/16"	70312	.1935	#10	72310	.1935	#10	72310	.1935	#10	72310
<b>799-210</b>	4 MM		.247	.265	.360	.2500	1/4"	70316	.2570	"F"	73306	.2610	"G"	73307	.2610	"G"	73306
<b>799-215</b>	5 MM		.278	.296	.360	.2812	9/32"	70318	.2900	"L"	73312	.2900	"L"	73312	.2969	19/64"	70319
<b>799-220</b>	6 MM		.372	.390	.505	.3750	3/8"	70324	.3750	3/8"	70324	.3860	"W"	73323	.3906	25/64"	70325
<b>799-225</b>	8 MM		.497	.515	.606	.5000	1/2"	70332	.5000	1/2"	70332	.5156	33/64"	70333	.5156	33/64"	70333
<b>799-230</b>	10 MM		.556	.577	.730	.5625	9/16"	70336	.5625	9/16"	70336	.5625	9/16"	70336	.5781	37/64"	70337

NOTE: In wood or other comparably soft materials, use minimum hole diameters regardless of material thickness


# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty<sup>TM</sup>*

## ALUMINUM TUBESERTS®

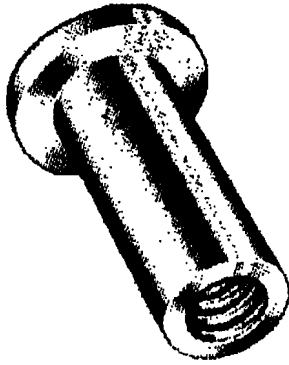

To install use  
installation tool  
#50404. For more  
info please see B-7

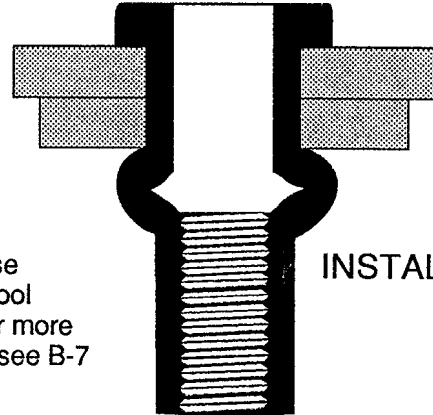

Thread Size	Grip Range	PART No.	HOLE SIZE <i>Cobalt</i> Spll #		MANDRIL PART No.		Steel Tubesert
6-32	.010-.079	6322	13/64 (70313)	BAA	6320	B	
6-32	.059-.118	799-400					
8-32	.010-.118	8322	1/4 (70316)		8320		
8-32	.118-.177	799-401					
10-24	.010-.118	10242	9/32 (70318)		10240		
10-24	.118-.216	799-402					
10-32	.010-.118	100322			100320		799-430
10-32	.118-.216	799-403					
1/4-20	.020-.118	14202	23/64 (70323)		1421		799-310
1/4-20	.118-.216	799-404					
5/16-18	.020-.118	516182	7/16 (70328)		516		799-106
5/16-18	.118-.216	799-405					
3/8-16	.031-.138	38162	31/64 (70331)		318		799-208
3/8-16	.138-.236	799-406					799-309
3 MM	.010-.079	6323	13/64 (70313)		799-205		
4 MM	.010-.119	6324	1/4 (70316)		7936		
5 MM	.010-.119	6325	9/32 (70318)		7937		
6 MM	.020-.118	6326	23/64 (70323)		7938		
8 MM	.020-.118	6328	7/16 (70328)		7940		
10 MM	.031-.138	6330	31/64 (70331)		799-235		

- Blind applications
- Will fit oversize hole
- Also available in Steel
- great for fibreglass, plastic and wood
- Won't Rust

Available in individual sizes or in our **SUPERFIX®** Assortments #700-050, #700-055, #700-060.


# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## PNEUMATIC U-SERT PLACING TOOL

INSERTS

O.E.M. Hardware Inc. presents a rugged high speed installation tool for our U-sert line. This tool is lightweight and completely portable. This particular tool has been used for many years and has received universal acclaim for it's durable construction and reliable performance.

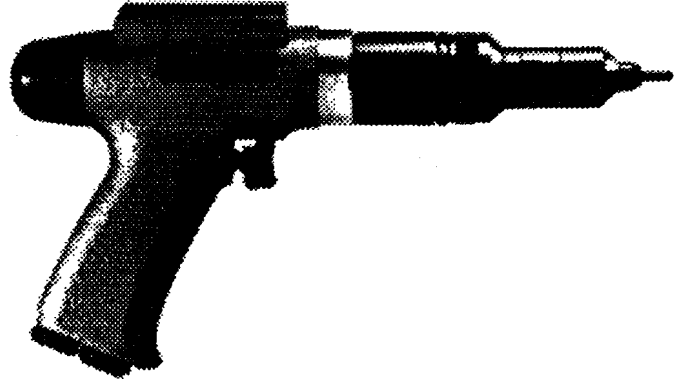

6 MONTH LIMITED  
WARRANTY

Part No.	Standard U-sert Capacity	Height	Length	Weight	RPMs	Air Pressure Require-
795-200	1/4-XX 6mm	5.75" 146mm	12.75" 324mm	3lb. 14oz 1.77 kg	1000	70-100 lb/in <sup>2</sup> 4.92-7.04 kg/sm <sup>2</sup>

THE FASTEST, MOST RELIABLE INSERT TOOL IN THE WORLD


MADE TO LAST A LIFETIME

WILL INSTALL ALL TYPES OF **U-SERTS®** & **TUBESERTS®**

■ WORKS JUST LIKE  
A RIVET GUN

■ REPLACEMENT  
PARTS AVAILABLE

■ GUARANTEED BY O.E.M.  
HARDWARE

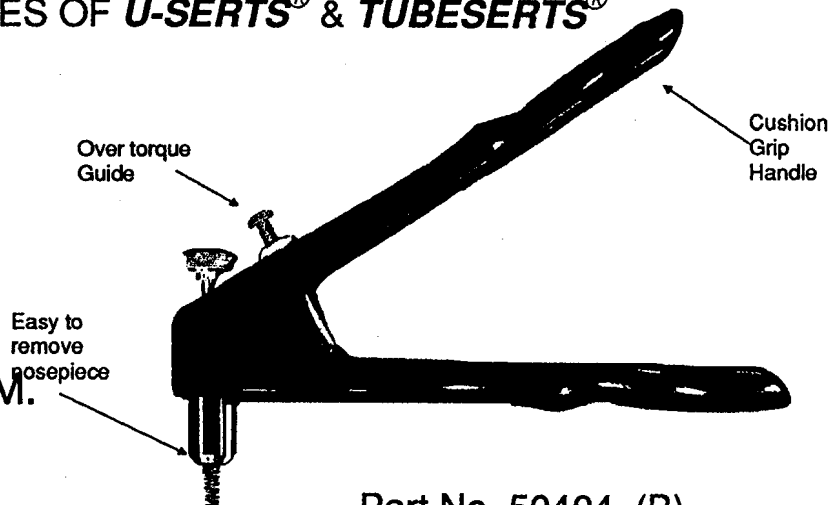


















Part No. 50404 (B)

LIFETIME WARRANTY\*













\* Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was intended.

# O.E.M. HARDWARE INC.













*Hard to Find Fasteners Our Specialty™*

SUPER-FIX ASSORTMENT ULTRA SERIES AND TOOL					No. 7735
6-48 CONVERSION KIT  \$2.50	8-48 CONVERSION KIT  \$3.50	10-48 CONVERSION KIT  \$4.50	12-48 CONVERSION KIT  \$5.50	14-48 CONVERSION KIT  \$6.50	 ULTRA TOOL \$20.00
6-48 THIN WASHER  \$0.25	8-48 THIN WASHER  \$0.35	10-48 THIN WASHER  \$0.45	12-48 THIN WASHER  \$0.55	14-48 THIN WASHER  \$0.65	
6-48 THICK WASHER  \$0.25	8-48 THICK WASHER  \$0.35	10-48 THICK WASHER  \$0.45	12-48 THICK WASHER  \$0.55	14-48 THICK WASHER  \$0.65	
<b>SUPER GRIP</b>  <p>FOR AUTHORIZED SERVICE THIS ASSORTMENT SHOULD BE MAINTAINED BY YOUR O.E.M. TECHNICIAN LOCAL 951-1100 1-800-663-6554</p>					


















**Part No. 7735**

SUPER-FIX ASSORTMENT ULTRA SERIES					No. 7740
6-48 THIN WASHER  \$0.25	8-48 THIN WASHER  \$0.35	10-48 THIN WASHER  \$0.45	12-48 THIN WASHER  \$0.55	14-48 THIN WASHER  \$0.65	 ULTRA TOOL \$20.00
6-48 THICK WASHER  \$0.25	8-48 THICK WASHER  \$0.35	10-48 THICK WASHER  \$0.45	12-48 THICK WASHER  \$0.55	14-48 THICK WASHER  \$0.65	
<b>SUPER GRIP</b>  <p>FOR AUTHORIZED SERVICE THIS ASSORTMENT SHOULD BE MAINTAINED BY YOUR O.E.M. TECHNICIAN LOCAL 951-1100 1-800-663-6554</p>					

**Part No. 7740**

SUPER-FIX ASSORTMENT TUBESERIES AND TOOL					No. 700-050
6-48 CONVERSION KIT  \$2.50	8-48 CONVERSION KIT  \$3.50	10-48 CONVERSION KIT  \$4.50	12-48 CONVERSION KIT  \$5.50	14-48 CONVERSION KIT  \$6.50	 TUBESERIES TOOL \$20.00
6-48 TUBESERIES  \$0.25	8-48 TUBESERIES  \$0.35	10-48 TUBESERIES  \$0.45	12-48 TUBESERIES  \$0.55	14-48 TUBESERIES  \$0.65	
<b>SUPER GRIP</b>  <p>FOR AUTHORIZED SERVICE THIS ASSORTMENT SHOULD BE MAINTAINED BY YOUR O.E.M. TECHNICIAN LOCAL 951-1100 1-800-663-6554</p>					

**Part No. 700-050**

SUPER-FIX ASSORTMENT TUBESERIES, THIN U-SERIES AND TOOL					No. 700-055
6-48 CONVERSION KIT  \$2.50	8-48 CONVERSION KIT  \$3.50	10-48 CONVERSION KIT  \$4.50	12-48 CONVERSION KIT  \$5.50	14-48 CONVERSION KIT  \$6.50	 TUBESERIES TOOL \$20.00
6-48 TUBESERIES  \$0.25	8-48 TUBESERIES  \$0.35	10-48 TUBESERIES  \$0.45	12-48 TUBESERIES  \$0.55	14-48 TUBESERIES  \$0.65	
6-48 THIN U-SERIES  \$0.25	8-48 THIN U-SERIES  \$0.35	10-48 THIN U-SERIES  \$0.45	12-48 THIN U-SERIES  \$0.55	14-48 THIN U-SERIES  \$0.65	
<b>SUPER GRIP</b>  <p>FOR AUTHORIZED SERVICE THIS ASSORTMENT SHOULD BE MAINTAINED BY YOUR O.E.M. TECHNICIAN LOCAL 951-1100 1-800-663-6554</p>					



**Part No. 700-055**




# O.E.M HARDWARE

**HARD TO FIND FASTENERS OUR SPECIALTY**

## Anchor Nut

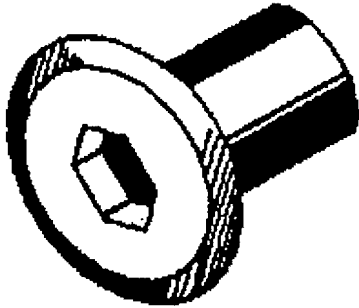

Hex Drive

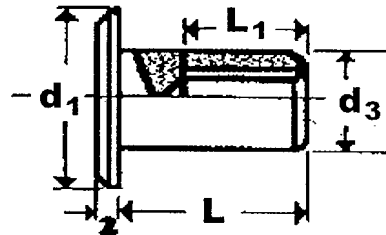

**MATERIAL:** Steel - Nickel Plate  
also available by special order in Bronze, Brass and Black Oxide

- HIGH QUALITY
- LOW PROFILE
- DECORATIVE
- COLD HEADED (NOT CAST)
- STEEL
- SUPERIOR TO ACORN NUTS

**USE WITH:** • Carriage Bolts • Hex Head Capscrews  
• Threaded Rod • Socket Head Capscrews

Part Number	Thread Size	L	L <sub>1</sub> Minimum	d <sub>1</sub>	d <sub>3</sub>
701-278	10-24	.630	.472	.512	.248
701-279	1/4-20	.472	.315	.669	.350
701-273	1/4-20	.669	.512	.669	.350
701-272	5/16-18	.669	.512	.669	.430
701-274	SAME AS 701-272 BUT COMES WITH 1-3/4 CARRIAGE BOLT				

# ***100% EXCLUSIVE WARRANTY***

***ALL PRODUCTS IN THIS  
CATALOG ARE COVERED  
BY STOCKTON's  
EXCLUSIVE WARRANTY***



**Should any product sold by O.E.M. HARDWARE  
fail as a result of manufactures defects during  
normal use (excluding fair wear and tear) simply return  
it to STOCKTON INDUSTRIES Inc. for repair or  
replacement.**

This warranty will be denied if inspection shows that product has been damaged, abused, altered, or used for purposes other than that for which it was designed. Items must be returned, freight prepaid.  
(tools covered by O.E.M.'s Exclusive Lifetime Tool Warranty  
see Section O for more information)

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## WOOD-SERTS®


ATTACHING ANYTHING TO WOOD IS A COMMON MAINTENANCE PROBLEM:

- Wood screws can strip out or not produce a tight fit.
- Ordinary inserts are awkward and hard to use.
- They can pull out or turn in the wood.


O.E.M. HAS SOLVED THESE PROBLEMS

- Now...at Last, a simple, easy and effective method for installing parts in soft wood.
- New improved WOOD-SERTS®
- No complicated instructions
- Fast, easy to use
- Saves time and labour


### INSTRUCTIONS



1. Just drill a hole the same size as the body of the wood-sert®.



2. With an ordinary screwdriver install the wood-sert®. Use of varnish as a lubricant is suggested. Install 1/16" to 1/8" below surface for greater pullout strength.



3. Position the attaching part and install screw or bolt. That's all there is to it!


**WOOD-SERTS®** are designed to secure threads from one side of the work in materials generally reserved for wood screws. **WOOD-SERTS®** are ideal for blind, closed, or through hole applications in all types of wood.

- Provides fast, easy installation
- Withstands high loads without vibration or loosening under extreme operating conditions
- Performance has been proven in plastic, aluminum, mild steel and fiberglass


# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## WOOD-SERTS®

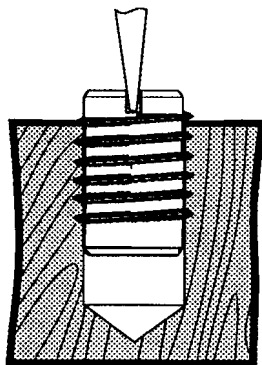

- FAST
- EASY TO INSTALL
- MULTIPLE SIZES
- WON'T PULL OUT
- ACTUALLY STRENGTHENS WOOD
- FOR USE IN ALL SOFT WOODS INCLUDING PINE




SIZE	PART No.	Coballoy® BRAD POINT DRILL SIZE(PART No.)	
4-40	9268	1/4" (730-008)	CF
6-32	9270	1/4" (730-008)	CF
8-32	9272	1/4" (730-008)	CF
10-32	9274	3/8" (730-012))	CF
10-24	9276	3/8" (730-012)	CF
1/4-20	9278	3/8" (730-012)	CF
1/4-28	9280	3/8" (730-012)	CF
5/16-18	9282	1/2" (730-016)	BA
5/16-24	9284	1/2" (730-016)	BA
3/8-16	9286	1/2" (730-016)	BA
3/8-24	9288	1/2" (730-016)	BA

Available in individual sizes or in our **SUPERFIX®** Assortments #700-065.


# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*


## GRIP-QUICK® WALL ANCHORS

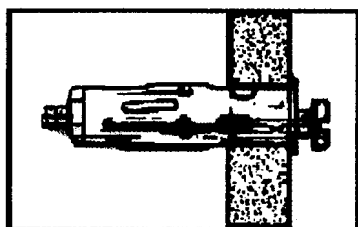


**1**  
Push fastener into  
pre-drilled hole.

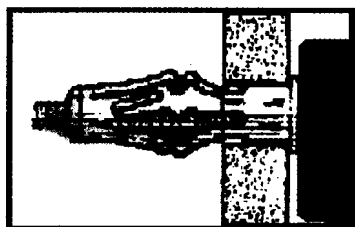

**2**  
Slip Grip-Quick  
Wall tool over  
screwhead.

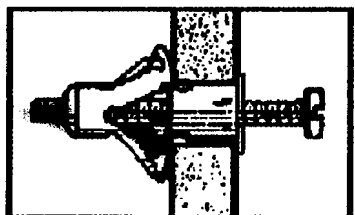

**3**  
Then simply  
squeeze the  
handle until the  
fastener is fully  
collapsed.

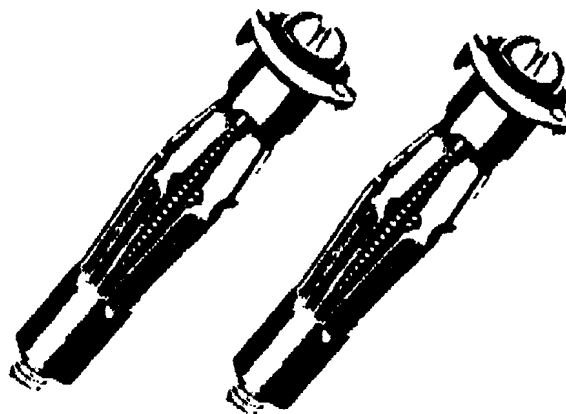

LIFETIME WARRANTY\*

INSERTS

Part No.	Screw size	For use in Walls	Drill Size	Coballoy® Brad Pt.	Code
796-050	6-32	0-1/4"	5/16"	730-010	BAA
796-053	6-32	1/8"-1/2"	5/16"	730-010	BAA
796-056	6-32	5/8"-7/8"	5/16"	730-010	BAA
796-059	6-32	1-1/4"-1-1/2"	5/16"	730-010	FA
796-062	10-24	1/8"-5/8"	7/16"	730-014	FA
796-065	10-24	5/8"-1-1/4"	7/16"	730-014	FA
796-068	10-24	1-1/4"-1-3/4"	7/16"	730-014	CF
796-071	1/4-20	1/8"-5/8"	1/2"	730-016	FA
796-074	1/4-20	5/8"-1-1/4"	1/2"	730-016	FA
796-077	1/4-20	1-1/4"-1-3/4"	1/2"	730-016	CF

Part No.  
795-080  
(B)

\* Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was intended.

Available in individual sizes or in our **SUPERFIX®** Assortments **#700-005**.

SOME OF THE ASSOCIATED  
PROBLEMS WITH INTERNAL  
THREADS WHEN THEY ARE  
DAMAGED OR STRIP OUT ARE:

- **EXPENSIVE DOWN TIME**
- **DAMAGED PARTS**
- **LOW PRODUCTION**

ORDINARY COIL INSERTS  
REQUIRE SPECIAL TOOLS, ARE  
HARD TO INSTALL AND OFTEN  
PULL OUT OR BACK OUT UNDER  
VIBRATION


LET **O.E.M.** SHOW YOU HOW  
TO SOLVE THIS PROBLEM



Here is the easy way to repair stripped threads


It's **Threadserts®**

**FROM O.E.M. HARDWARE INC.**




**1**

Drill out old threads,  
using a standard drill.




**2**

tap new threads  
using standard tap.




**3**

Screw in insert until  
slightly below  
surface. "Kees" act  
as a depth stop.



**4**

Drive "Kees" down  
with several light  
taps.



**5**

Installed Threadsert®.

## FEATURES

- Installed with standard drills and taps.
- No pre-winder tool required.
- Impossible to cross thread while installing.
- No tang break-off.
- Positive mechanical lock against rotation.
- May be used in virtually any material...aluminum, magnesium, cast iron, cold rolled steel and plastic.
- Provides high strength and reliability. One length per size provides maximum pullout strength. Breaks Grade 8 bolts in test after test.
- Easy to remove.
- No special skills required. Installation procedures can be learned in minutes.

## TYPICAL APPLICATIONS

- |                         |                   |
|-------------------------|-------------------|
| • Automobiles           | • Buses           |
| • Trucks                | • Heavy Equipment |
| • Marine Equipment      | • Machinery       |
| • Tooling               | • Power Tools     |
| • Recreational Vehicles | • Small Engines   |

Available in individual sizes or in our **SUPERFIX®** Assortments **#7741**, **#8001**, **#8002**, **#8003**, **#8004**, **#8006**, **#8045**.

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

**THREAD SERTS®**




Size	Length	Part No		Coalloy SPII	Coalloy TAP
8-32	31	34817	BA/F	"I"-(73309)	5/16-18-(67386)
10-24	.31	33597			
10-32		34843		"Q"-(73317)	3/8-16-(67401)
1/4-20	.37	33666			
1/4-28		38187		"X"-(73324)	7/16-14-(67431)
5/16-18	.43	33762			
5/16-24		38197		29/64-(70329)	1/2-13-(67441)
3/8-16	.50	33788			
3/8-24		38252	F/D	33/64-(70333)	9/16-12-(67451)
7/16-14	.62	34302		37/64-(70337)	5/8-11-(67461)
7/16-20		38282			
1/2-13	.62	34307		45/64-(70345)	3/4-16-(67481)
1/2-20		38288			
9/16-12	.81	35513		53/64-(70353)	7/8-14-()
9/16-18		35582			
5/8-11	.87	34327	D/B	1-1/16-(70368)	1-1/8-12-()
5/8-18		38292			
3/4-10	1.12	34646			
3/4-16		38297			
7/8-9	1.25	64479	B	1-3/16	1-1/4-12
7/8-14		64480		1-5/16	1-3/8-12
1"-8	1.37	64481			
1"-14		64482		1-7/16	1-1/2-12
1-1/8-7	1.62	64483			
1-1/8-12		64484		1-9/16	1-5/8-12
1-1/4-7	1.81	64485			
1-1/4-12		64486		1-13/16	1-7/8-12
1-1/2-6	2.0	64487			
1-1/2-12		64488			
5MM X .08	.315	35942	BA/F	"H"-(73308)	8MM X 1.25
6MM X 1.0	.394	35971		"S"-(73319)	10MM X 1.25
8MM X 1.0 New	.472	35978		27/64-(70327)	12MM X 1.25
8MM X 1.25		35979			
10MM X 1.25 New	.551	36011	F/D	1/2-(70332)	14MM X 1.50
10MM X 1.5		36012			
12MM X 1.25 New	.630	36097		37/64-(70337)	16MM X 1.50
12MM X 1.75		36098			



# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## **SPARK PLUG THREAD SERTS®**



INSERTS

Thread Size	Spark Plug Reach (inches)	Part No.
M14 x 1.25	3/8	795-827 (B)
M14 x 1.25	7/16	795-826 (B)
M14 x 1.25	1/2	795-825 (B)
M14 x 1.25	3/4	795-821 (B)

Tool Description	Part No.
Insert Installation Tool	795-002 (B)
3/4-16 Tap	67481 (B)

14MM Sealing Washer	795-830 (B)
---------------------	-------------

# O.E.M HARDWARE

*"Hard to Find Fasteners Our Specialty"™*

#103-12779-80TH AVE. SURREY, B.C. V3W-3A6 PH.(604)591-1100 FAX (604)591-8133

SOLD TO: \_\_\_\_\_

C.O.D

PAGE #

#OF PAGES  
TO ORDER

ORDER DATE

P.O.#

BUYERS NAME

SHIP TO: \_\_\_\_\_

ACCT.#

PHONE #

EMAIL ADDRESS

FAX #

P.S.T #

AGENTS NAME

AGENT CODE

ZONE

ORDER

PART #

DESCRIPTION

PRICE

PER

AMOUNT

1

2

3

4

5

6

7

8

9

10

11

12

NO RETURN GOODS ACCEPTED WITHOUT WRITTEN PERMISSION.  
CLAIMS FOR SHORTAGES OR DAMAGED GOODS ONLY WITHIN 48 HOURS.

BUYER'S SIGNATURE X

NAME OF CARRIER.

SUBTOTAL

G.S.T

P.S.T

SHIPPING

TOTAL

TOTAL LINES

New

ESTABLISHED

VISA MC CARD#

CARD HOLDER


EXP.

# O.E.M. HARDWARE


"Hard to Find Fasteners our Specialty"™

## NO DRILLING REQUIRED

### MEDIUM DUTY

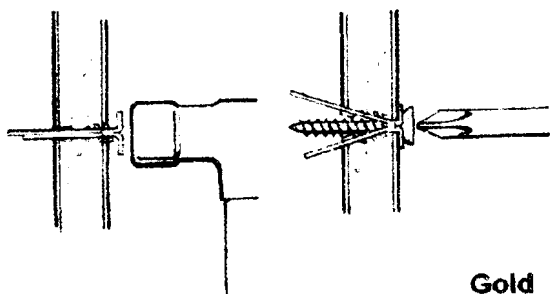

Gold



\*For use with a minimum 1-1/4" length screw


- **80 LB. PULL OUT**
- **FAST INSTALLATION**
- **REMOVABLE**
- **WON'T LEAVE LARGE HOLES**
- **CAN BE USED IN DRYWALL, PANELING, HOLLOW DOORS AND THIN PLASTER**

## POWER-PLUG


### GOLD™

PART # 888-260 (BAA)

### HEAVY DUTY

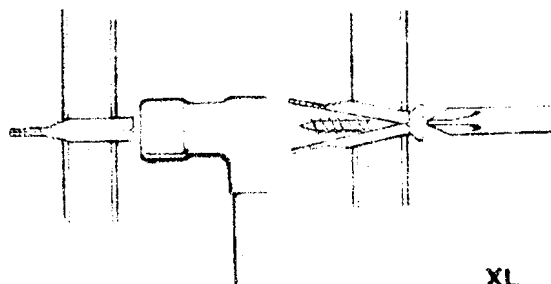

XL



\*For use with a minimum 2" length screw

- **125 LB. PULL OUT**
- **FAST INSTALLATION**
- **REMOVABLE**
- **WON'T LEAVE LARGE HOLES**
- **CAN BE USED IN 5/8" TO 1" DRYWALL, FIRE PROOF DRYWALL AND THIN PLASTER**

## POWER-PLUG

### XL™

PART # 888-440 (BAA)


## POWER-PLUG™

# O.E.M. HARDWARE


*Hard to Find Fasteners Our Specialty™*

## ULTRA ANCHORS

**NEW  
ENGINEERED  
PLASTIC**

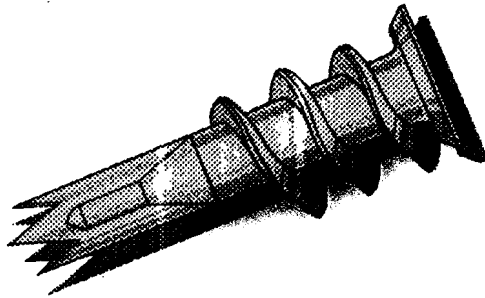


ULTRA ANCHORS-METAL-NON CORROSIVE		
PART NO		
794-091		BAA/FA
ULTRA ANCHORS-PLASTIC-NON CONDUCTIVE		
794-090		BAA/FA

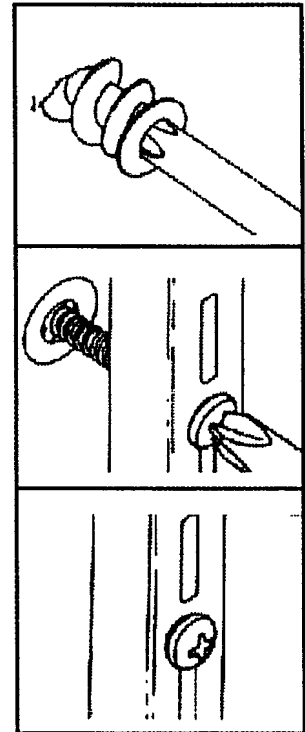


## SUPER-GRIP ANCHORS

MATERIAL THICKNESS	PART NUMBER	
1/8" TO 1/4"	791-269	BAA
3/8" TO 1/2"	791-270	
5/8" TO 3/4"	791-271	

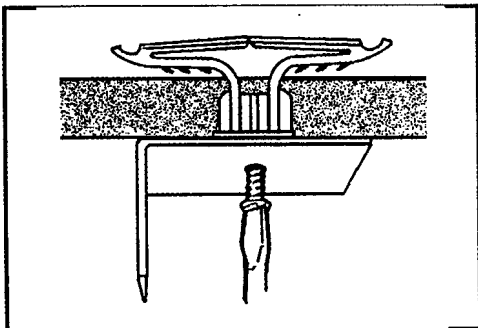

- Hollow Wall Anchor
- Expansion Anchor
- Snap Action
- Vertical or Horizontal
- No Special tools required
- One size fits all screws- #6, #8, #10, #12, #14




# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## NAIL ANCHORS

- **TAP-IN LIKE A NAIL**
- **REMOVE LIKE A SCREW (NYLON)**

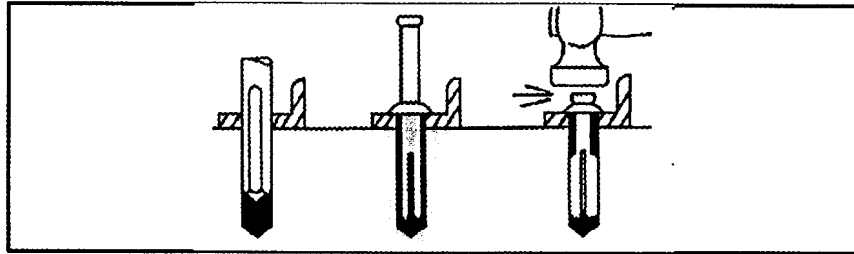

- **FEATURES**
- Taperproof
- One Piece anchor
- Anchor size is hole size
- Through fastening

- **TYPICAL APPLICATIONS**
- Flashing
- Brick ties
- Stud wall
- Lightweight fixture, signs

SUPER NAIL ANCHORS-STEEL							
SIZE	DRILL	HEAD DIA	HEAD THICK NESS	WORK THICK NESS	OVERALL LENGTH	PART NO	
3/16 X 7/8	3/16"	13/32	1/8"	0-1/4"	1"	791-360	BAA/FA
1/4 X 1	1/4"	9/16		0-1/4"	1-1/8"	791-361	BAA/FA
1/4 X 1 1/4	1/4"	9/16		1/4"-1/2"	1-5/8"	791-362	FA/CF
1/4 X 1 1/2	1/4"	9/16		1/2"-3/4"	1-7/8"	791-363	FA/CF
1/4 X 2	1/4"	9/16				791-364	FA/CF






SUPER NAIL ANCHORS-NYLON			
SIZE	DRILL	PART NO	
3/16 X 1	3/16"	791-365	BAA/FA
3/16 X 1 1/2	3/16"	791-366	BAA/FA
1/4 X 1	1/4"	791-367	BAA/FA
1/4 X 1 1/2	1/4"	791-368	BAA/FA
1/4 X 2	1/4"	791-369	BAA/FA



# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty™*

## ANCHORS

SIZE	DRILL	100 PAK PART NO	500 PAK PART NO	BULK PART NO	BULK QTY	
<b>SUPER RIB WALL ANCHOR-BLUE PLASTIC</b>						
6-8 X 3/4	3/16"	791-315	791-327	791-339	25M	
8-10 X 7/8	3/16"	791-316	791-328	791-340	20M	
10-12 X 1	1/4"	791-317	791-329	791-341	15M	
12-14 X 1 3/8	1/4"	791-318	791-330	791-342	5M	
<b>SUPER TANG WALL ANCHORS-SILVER NYLON</b>						
3/16 X 1	3/16"	791-319	791-331	791-343	30M	
7/32 X 1 3/16	7/32"	791-320	791-332	791-344	20M	
1/4 X 1 3/8	1/4"	791-321	791-333	791-345	15M	
5/16 X 1 9/16	5/16"	791-322	791-334	791-346	10M	
3/8 X 1 15/16	3/8"	791-326	791-335	791-347	5M	
<b>SUPER RING WALL ANCHORS-YELLOW PALSTIC</b>						
3/16 X 7/8	3/16"	791-324	791-336	791-348	50M	
1/4 X 1 1/4	1/4"	791-325	791-337	791-349	25M	
5/16 X 1 1/2	5/16"	791-326	791-338	791-350	20M	